INVEST IN THE FUTURE

SELECTION

WELDING & CHARGE



MMA – MIG/MAG – TIG – PLASMA – PROTECTIONS & ACCESSORIES
CHARGE, STARTING & ACCESSORIES – FLAMME WELDING

2026

A solid manufacturing group

900 people

C1+
Credit Rating
Banque de France

€ 145 000 000

55 000 m²
2 factories

FRENCH MANUFACTURER
SINCE 1964

A family company



Nicolas & Bruno
Bouygues

Global coverage

125 countries

5 catalogues

3 500+ references




MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Stud welding
Spot welding
Accessories
Protection
Consumables



Spot welding
Dent pulling
MIG-MAG/
GMAW-FCAW
Plasma cutting
Induction heating
Riveting
Lifting
Bodyshop tools



Chargers
Battery support units
Boosters
Starters
Testers
Portable energy
Jumper cables
EV charging
Accessories




Releasing
Shrink-fitting
Stripping
Straightening
Dent removal
Bending
Brazing



MMA/SMAW
TIG/GTAW
MIG-MAG/
GMAW-FCAW
Plasma cutting
Charge

The complete solution

to meet all needs

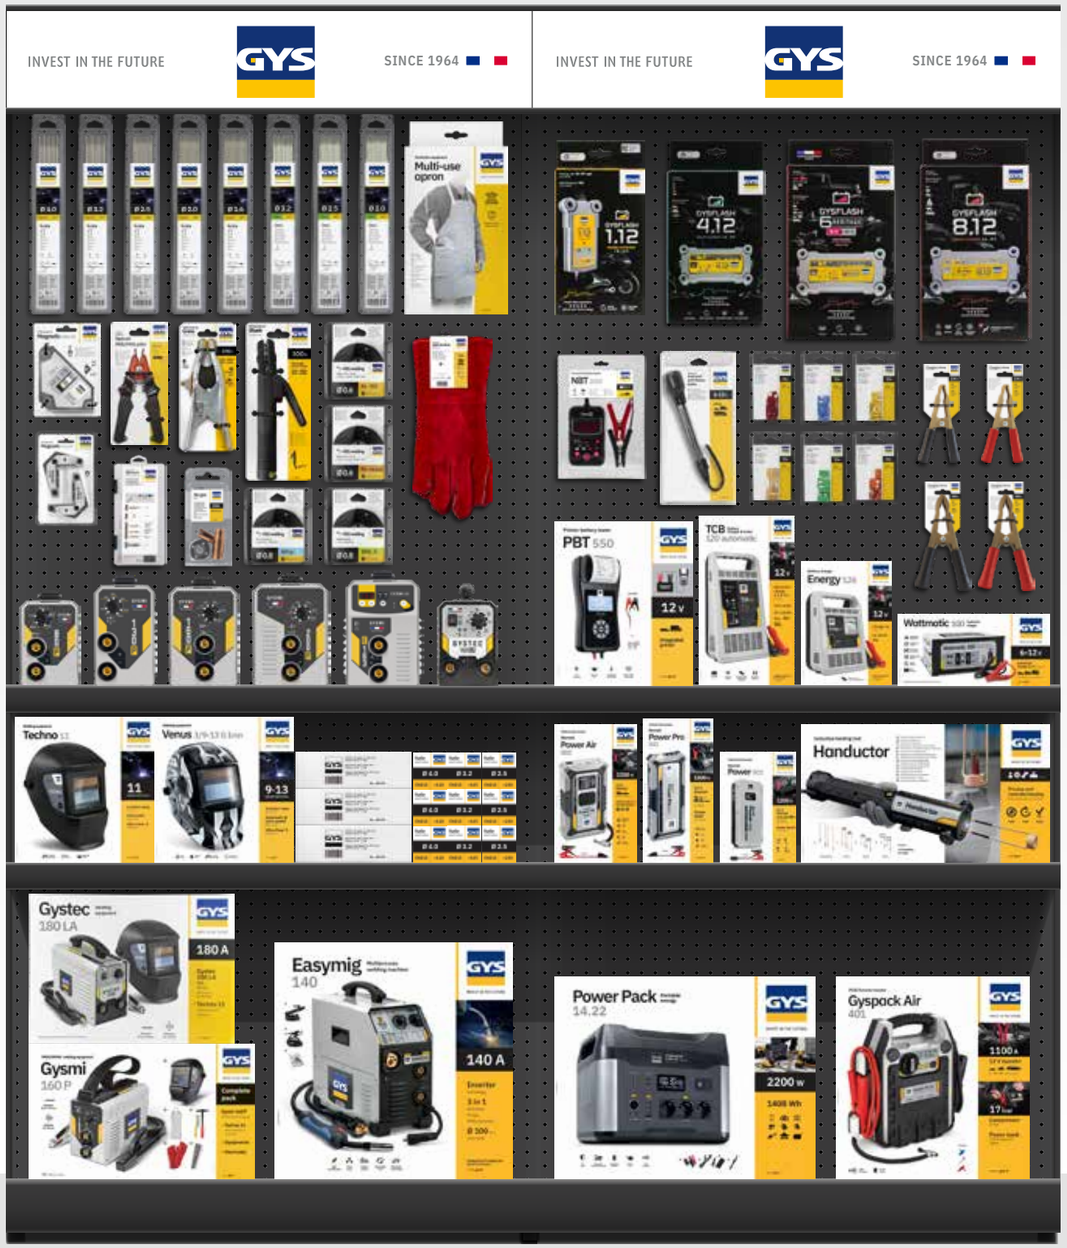

MMA - ELECTRODE

GYSMI INVERTER POTENTIOMETER





GYSMI 80P
80A



Ref.029958



GYSMI 100A
100A



Ref.083622



Ref.085107



GYSMI 120A
120A



Ref.083639



GYSMI 130P
130A



Ref.029972



GYSMI 160A
160A



Ref.083646



Ref.083790



Ref.083745 Techno 11



Ref.083752 Techno 11



GYSMI 160P
160A



Ref.030077



Ref.030435 Techno 11



Ref.013360 Techno 11



GYSMI 200A
200A



Ref.083653



Ref.088665



GYSMI 200P
200A



Ref.030794



TIG TORCH KIT SR17 V (VALVE)
4 m

FOR GYSMI & GYSTEC

38 × 31 × 11 cm/2 kg

Ref.087583

		50/60 Hz	A	(MMA) A	(TIG) A	Ø mm	Ø1.6	2	2.5	3.2	4	5	X% (20°C) normal use	EN60974-1 (40°C) I(A) 60%	X% (I2 max)	Uo	L × W × H cm / kg	Protected & compatible Power generator (+/-15%)	
Made in France	GYSMI 80P	230 V	10	10 › 80	---	1.6 › 2.5	62	50	20	---	---	---	45% @ 80 A	31 A	5%	85 V	029958 - 30 x 19 x 17 / 3.7	3.5 kW	3.7 kVA
Made in GYS China	GYSMI 100A	230 V	16	10 › 100	---	1.6 › 2.5	62	50	20	---	---	---	25% @ 100 A	50 A	14%	63 V	083622 - 29 x 17 x 16 / 3.2 085107 - 35 x 14 x 30 / 3.6	6.5 kW	7.5 kVA
	GYSMI 120A	230 V	16	10 › 120	---	1.6 › 3.2	62	50	47	24	---	---	40% @ 120 A	70 A	20%	64 V	083639 - 33 x 14 x 27 / 4.5	4.5 kW	5 kVA
Made in France	GYSMI 130P	230 V	13	10 › 130	---	1.6 › 3.2	62	50	47	24	---	---	55% @ 115 A	45 A	5%	72 V	029972 - 41 x 14 x 34 / 5.5	4.5 kW	5 kVA
Made in GYS China	GYSMI 160A	230 V	16	10 › 160	---	1.6 › 4	62	50	38	18	7	---	20% @ 160 A	85 A	10%	66 V	083646 - 30 x 18 x 17 / 4.6 083790 - 33 x 14 x 27 / 5.2 083745 - 38 x 22 x 24 / 5.1 083752 - 39 x 31 x 25 / 6.4	6.5 kW	7.5 kVA
Made in France	GYSMI 160P	230 V	16	10 › 160	---	1.6 › 4	62	50	47	45	22	---	60% @ 160 A	85 A	14%	72 V	030077 - 42 x 18 x 37 / 6.6 030435 - 41 x 30 x 25 / 6 013360 - 40 x 31 x 25 / 7.6	6.5 kW	7.5 kVA
Made in GYS China	GYSMI 200A	230 V	32	20 › 200	---	1.6 › 5	62	50	47	31	16	6	20% @ 200 A	90 A	10%	63 V	083653 - 34 x 20 x 18 / 6.2 088665 - 33 x 27 x 19 / 5	7.5 kW	10 kVA
Made in France	GYSMI 200P	230 V	32	10 › 200	---	1.6 › 5	62	50	47	45	30	21	58% @ 200 A	110 A	14%	72 V	030794 - 42 x 17 x 37 / 7.9	7.5 kW	10 kVA

GYSMI E INVERTER DIGITAL

New packaging design





GYSMI E160
160A **TIG LIFT**

Ref.083776



Ref.083783



Techno 11



GYSMI E163
160A **TIG LIFT** **MMA PULSE**

Ref.036635



GYSMI E200 FV
200A **TIG LIFT** **MMA PULSE** **PFC** **FV**

Ref.031210



PFC : POWER FACTOR CORRECTION

185 V ⟷ 265 V

100 m

FV : FLEXIBLE VOLTAGE

85 V ⟷ 265 V

100 m

GYSTEC MMA + TIG LIFT



GYSTEC 160 LA
160A **TIG LIFT**

Ref.084902



Ref.088436



GYSTEC 180 LA
180A **TIG LIFT**

Ref.083554



Ref.084919



Techno 11

New packaging design





GYSTEC 200 LA
200A **TIG LIFT**

Ref.084926



GYSTEC 180E
180A **TIG LIFT**

Ref.087712

GYSTEC E180 PFC
180A **TIG LIFT** **PFC**

Ref.083608

		50/60 Hz	A	(MMA) A	(TIG) A	Ø mm	Ø1.6	2	2.5	3.2	4	5	X% (20°C) normal use	EN60974-1 (40°C) I(A) 60%	X% (I2 max)	Uo	L × W × H cm / kg	Protected & compatible Power generator (+/-15%)	
Made in GYS China	GYSMI E160	230 V	16	10 › 160	10 › 160	1.6 › 4	62	50	38	18	7	---	20% @ 160 A	85 A	10%	66 V	083776 - 33 x 13 x 27 / 5.2 083783 - 38 x 22 x 24 / 5.1	6.5 kW	7.5 kVA
Made in France	GYSMI E163	230 V	16	10 › 160	10 › 160	1.6 › 4	62	50	47	45	22	---	60% @ 160 A	85 A	14%	72 V	036635 - 42 x 17 x 37 / 7	6.5 kW	7.5 kVA
	GYSMI E200 FV	230 V 110 V	16 20	10 › 200 10 › 130	10 › 200 10 › 130	1.6 › 5	62	50	47	45	35	24	64% @ 200 A	120 A 95 A	20% 39%	96 V	031210 - 42 x 17 x 37 / 8.8	7.5 kW	10 kVA
Made in GYS China	GYSTEC 160 LA	230 V	16	10 › 160	10 › 160	1.6 › 4	62	50	38	18	7	---	20% @ 160 A	85 A	10%	65 V	084902 - 30 x 18 x 22 / 4.8 088436 - 33 x 19 x 27 / 5.4	6.5 kW	7.5 kVA
	GYSTEC 180 LA	230 V	16	15 › 180	15 › 180	1.6 › 4	62	50	40	30	15	---	30% @ 180 A	95 A	15%	64 V	083354 - 37 x 17 x 31 / 6.9 084919 - 37 x 22 x 27 / 6	7 kW	10 kVA
	GYSTEC 200 LA	230 V	16	15 › 200	15 › 200	1.6 › 5	62	50	40	30	15	6	25% @ 200 A	100 A	12%	64 V	084926 - 37 x 17 x 31 / 7.3	7.5 kW	10 kVA
	GYSTEC 180E	230 V	16	20 › 180	20 › 180	1.6 › 4	62	50	40	30	15	---	32% @ 180 A	105 A	17 %	64 V	083608 - 48 x 23 x 40 / 11.4	7 kW	10 kVA
	GYSTEC E180 PFC	230 V	16	15 › 180	15 › 180	1.6 › 4	62	50	47	40	20	---	40% @ 180 A	110 A	20 %	64 V	083608 - 48 x 23 x 40 / 11.4	7 kW	10 kVA

MIG/MAG

SMARTMIG : With better quality and higher productivity than MMA welding, SMARTMIG allows access to the world of semi-automatic welding (MIG/MAG). These traditional power sources are easy to use, making them perfectly suited to both welders and DIY enthusiasts for either light fabrication or repairs.

EASYMIG / MULTIWELD : The EASYMIG and MULTIWELD's versitilty combines MIG/MAG, MMA and TIG DC processes. With its user-friendly interface, it allows welders to join together materials up to 4 mm thick (steel, stainless steel or aluminum). The built-in Inverter technology results in a smaller, lighter machine that's perfect for mobile welders.

SMARTMIG TRADITIONAL

SIMPLE TO USE
Example : Smartmig 162





SMARTMIG 110
110A ø 100 mm
NO GAZ

Ref.033993 +
2 m 1.65 m, 6 mm²

SMARTMIG 142
140A ø 100/200 mm
GAZ NO GAZ

Ref.033153 +
2 m 1.65 m, 10 mm²

SMARTMIG 162
160A ø 100/200 mm
GAZ NO GAZ

Ref.033160
(UK) Ref.034297 +
2 m 1.65 m, 10 mm²

New packaging design



Made in GYS China	50/60 Hz	A	A	100	200	GAS	NO GAS	EN60974-1 (40°C) I(A) 60%	EN60974-1 (40°C) X% I_2 max	Wheel	Euro	Gas / No Gas Easy change	L × W × H cm / kg	Uo (V)	Original Equipement			Protected & compatible Power generator (+/-15%)
																TYPE		
SMARTMIG 110	230V 1~	13	40 › 110	•	---	---	0.6 › 0.9	---	85A @ 6%	---	---	---	40 x 39 x 19 / 13.6	25.5 › 30	0.9	D 044081	0.9	3 kW
SMARTMIG 142	230V 1~	13	40 › 140	•	•	0.6 › 0.8	0.6 › 0.9	60	90A @ 20%	---	---	•	50 x 25 x 44 / 22.5	28 › 39	0.6 / 0.8	A 042339	0.8	3.5 kW
SMARTMIG 162	230V 1~	16	30 › 160	•	•	0.6 › 1.0	0.9 › 1.2	70	115A @ 20%	•	•	•	56 x 26 x 46 / 28.1	25.5 › 40	0.6 / 0.8	A 042339	0.8	5 kW

EASY TO USE
Example : Easymig 160



EASYMIG / MULTIWELD INVERTER



EASYMIG 85
85A ø 100 mm
NO GAZ

Ref.065536 +

New packaging design



EASYMIG 130
120A ø 100 mm
GAZ NO GAZ MMA

Ref.032231 +

EASYMIG 140
140A ø 100 mm
GAZ NO GAZ MMA

Ref.032262 +



EASYMIG 150
140A ø 100/200 mm
GAZ NO GAZ MMA PULSE

Ref.032248 +

EASYMIG 160
160A ø 100/200 mm
GAZ NO GAZ MMA PULSE

Ref.032255 +

New packaging design



MULTIWELD 180M-C
180A ø 200/300 mm
GAZ NO GAZ MMA PULSE

Ref.078727 +

M6 - Ø0.9/1.0 (x3)

Buse No Gas 150A (x1)

Ø0.9/1.2 (x1)

NO GAS WELDING KIT
Ref.041240

Made in GYS China	50/60 Hz	A	A	100	200	300	Steel	Alu	GAS	NO GAS	Ø mm MMA	EN60974-1 (40°C) I(A) 60%	EN60974-1 (40°C) X% I_2 max	Electronic control	Euro	Gas/No Gas Easy change	L × W × H cm / kg	Uo (V)	Original Equipement TYPE	
EASYMIG 85	230V 1~	16	30 › 85	•	---	---	•	---	—	0.6 › 0.9	---	50	85A @ 20%	•	---	•	39 x 24 x 29 / 7.9	30	0.6 / 0.9	D 068926	0.6
EASYMIG 130	230V 1~	16	30 › 120	•	---	---	•	---	0.6 › 0.8	0.6 › 0.9	1.6 › 3.2	70	120A @ 20%	•	---	•	43 x 18 x 42 / 10.5	62	0.8 / 0.9	D 039476	0.8 / 0.9
EASYMIG 140	230V 1~	16	30 › 140	•	---	---	•	•	0.6 › 0.8	0.6 › 0.9	1.6 › 3.2	80	140A @ 15%	•	•	•	43 x 19 x 42 / 11.3	62	0.8 / 0.9	D 039476	0.8 / 0.9
EASYMIG 150	230V 1~	16	30 › 140	•	•	---	•	•	0.6 › 0.8	0.6 › 0.9	1.6 › 3.2	80	140A @ 15%	•	•	•	52 x 25 x 36 / 13	62	0.8 / 0.9	A 046856	0.8 / 0.9
EASYMIG 160	230V 1~	16	30 › 160	•	•	---	•	•	0.6 › 0.8	0.6 › 0.9	1.6 › 3.2	95	160A @ 20%	•	•	•	50 x 24 x 36 / 14.3	59	0.8 / 0.9	A 046856	0.8 / 0.9
MULTIWELD 180M-C	230V 1~	16	30 › 180	•	•	•	•	•	0.6 › 0.8	0.6 › 0.9	1.6 › 3.2	110	180A @ 20%	•	•	•	58 x 30 x 49 / 21.1	59	0.8 / 0.9	A 046856	0.8

TIG

The ultimate welding machine thanks to both its quality and precision, the PROTIG is ideal for tradesmen, maintenance services, pipefitters or domestic use.

It enables the joining of steel, stainless steel and copper from 0.6 to 4 mm thick in addition to being able to carry out MMA welding.

PROTIG DC



PROTIG 161 DC

160A TIG PULSE MMA PULSE

Ref.062054 +



TIG 17

EN 1090



PATENTS REGISTERED
EUROPEAN TRADEMARK & DESIGN

PROTIG AC/DC



PROTIG 200 AC/DC

200A TIG PULSE MMA PULSE

Ref.068742 +



TIG 26

		50 / 60 Hz	A	I2 TIG A	I2 MMA A	Integrated Technology TIG PULSE	Integrated Technology MMA PULSE	TIG EN60974-1 (40°C) I(A) 60%	TIG EN60974-1 (40°C) X% I2max	MMA EN60974-1 (40°C) I(A) 60%	MMA EN60974-1 (40°C) X% I2max	Uo	L × W × H cm / kg	Protected & compatible Power generator (+/-15%)
Made in France	**PROTIG 161 DC**	230 V 1~	16	10 › 160	10 › 160	0.1 › 100 Hz	0.4 › 20 Hz	105 A	20%	95 A	15%	92 V	36 x 24 x 35 / 13	6 kW / 7.5 kVA
Made in GYS China	**PROTIG 200 AC/DC**	230 V 1~	13	AC 10 › 200 / DC 10 › 160	10 › 160	0.1 › 900 Hz (DC) / 0.1 › 20 Hz (AC)	•	AC 90 A / DC 115 A	AC 20 % / DC 20%	90 A	20 %	64 V	47 x 34 x 39 / 18.8	7.5 kW / 10 kVA

PLASMA

Cutting metal materials has never been easier with the EASYCUT. These plasma cutters are able to cut materials up to 18 mm thick (15 mm clean cut).

Suitable for use on steel, stainless steel, aluminum or even copper, the EASYCUT is very user-friendly, lightweight and easy to transport.

EASYCUT





EASYCUT 25

25A Fe 8 mm Al/CrNi 6 mm

Ref.065543
(UK) Ref.072046 +



with TPT 25

EASYCUT 40

40A Fe 18 mm Al/CrNi 15 mm

Ref.029743 +



with TPT 40



K 100% Self sufficient



K 100% Self sufficient

INTEGRATED AIR FILTER

AUTOMATIC DRAIN

EASYCUT K25

25A Fe 8 mm Al/CrNi 6 mm

INTEGRATED COMPRESSOR

Ref.068063 +



with TPT 25

EASYCUT K35 PFC

35A Fe 15 mm Al/CrNi 10 mm

INTEGRATED COMPRESSOR PFC

Ref.080768 +



with TPT 25

		A	I2 A	Severance cut mm Fe	Severance cut mm Al/CrNi	Clean cut mm Fe	Clean cut mm Al/CrNi	Integrated Technology P400	Integrated Technology COMPRESSOR	AIR SYSTEM min	AIR SYSTEM ideal	AIR SYSTEM max	EN60974-1 (40°C) IA 60%	EN60974-1 (40°C) X% I2max	L × W × H cm / kg	Protected & compatible Power generator (+/-15%)
Made in GYS China	**EASYCUT 25**	16	10 › 25	8	6	6	4	---	---	2.5 bar	4.5 bar 115L/min	6.5 bar	15 A	30%	45 × 25 × 35 / 9.7	---
	EASYCUT 40	32	10 › 40	18	15	15	10	---	---	2.5 bar	4.5 bar 115L/min	6.5 bar	10 A	20%	45 × 25 × 35 / 11.5	---
Made in France	**EASYCUT K25**	16	10 › 25	8	6	6	4	•	•	included			15 A	35%	53 × 31 × 48 / 19	6.5 kW / 7.5 kVA
	EASYCUT K35 PFC	16	10 › 35	15	10	10	8	•	•	included			26 A	30%	51 × 31 × 47 / 21.4	8 kW / 10 kVA

Accessories & Consumables

MMA

Electrodes



		Ø mm	mm	X …	kg	Ref.
Steel	❶	1.6	300	17	0.16	084315
			300	50	0.41	084414
		2.0	350	13	0.22	084322
			350	50	0.71	084421
		2.5	350	11	0.24	084339
			350	50	1	084438
		3.2	350	9	0.30	084346
			350	50	1.50	084445
		4.0	350	8	0.38	084353
			350	50	---	084452
	❷	1.6	300	210	1.65	085114
		2.0	350	155	2.08	085121
		2.5	350	110	2.11	085138
		3.2	350	70	2.09	085145
		4.0	350	47	2.21	085152
	❸	2.0	350	355	4.82	085022
		2.5	350	230	4.46	085039
		3.2	350	165	4.85	085046
		4.0	350	110	5.39	085053
Cast Iron	❹	2.5	350	12	---	083332
		3.2	350	9	---	083349
Stainless Steel	❺ 308L	2.0	300	14	---	073692
		2.5	300	10	---	082328
	❻ 316L	2.0	300	12	---	082359
		2.5	300	10	---	082335
			300	30	---	081499
		3.2	350	8	---	082342
Alu	❼	1.6	330	60	0.15	069534
		2.4	330	27	0.14	069565
		2.5	350	7	---	073708
		3.2	350	5	---	084803

Electrode Holders



200 A
max : 25mm²
Ref.043497



200 A
max : 35mm²
Ref.043602



300 A
max : 50mm²
Ref.043701

MMA Kits



Assembled
150/200 A
16mm² 4m
10/25 mm²
Ref.043848



200 A
PE 1.6 / PM 2m
16mm² 4m
10/25mm²
Ref.047372

TIG

GTAW filler rods



	Steel	Stainless steel 316L	Stainless steel 308L	Alu
Ø 1.6	x 60 087224	x 60 087262	x 60 087248	x 60 069534
Ø 2.0	x 40 087231	x 40 087279	x 40 087255	x 40 087286
Ø 2.4	---	---	---	x 27 069565

Tungsten Electrodes



	Steel / Stainless Steel / Alu E3	WR2	Lanthane WL15
Ø 1.6	x 10 046733	x 10 044586	x 10 045330
Ø 2.0	x 10 046764	x 10 044593	x 10 045347
Ø 2.4	x 10 046771	x 10 044609	x 10 045354



Gas connectors
x2
ø = 5mm
Ref.045705



Consumables kit
TIG 17/26 AC/DC
Ref. 044678



TIG Torch
For Gysmi/Gystec
TIG 17V - 4m
Ref. 087583

MIG

Wire Reels





Ø	Steel SG2 (Gas)			Steel Cored wire (No Gas)		Stainless steel 308L		Alu AlMg5	
0.6	100mm 086593 0.9kg	200mm 086111 5kg	---	100mm 086425 0.9kg		---		---	
0.8	100mm 086609 0.9kg	200mm 086128 5kg	300mm 086227 15kg	---		100mm 086616 1kg	200mm 086579 5kg	100mm 086548 0.5kg	200mm 086555 2kg
0.9	---		---	100mm 086104 0.9kg	200mm 086265 4.5kg	---		---	
1.0	200mm 086135 5kg	300mm 086234 15kg	---	200mm 086623 4.5kg		---		200mm 086562 2kg	

Torches


I max 150A, L : 3m
Contact tips : Ø0.8
X 60% / 40°C / Ar Co2 : 150A

Steel
Ref.063754


Alu
Ref.063761



Consumables



			Steel No Gas	Steel Gas	Stainless steel	Alu	Cored wire	
1	Gas nozzle		(x1) 041868	(x3) 041875	---	---	---	---
2	Contact tubes		Ø0.6 (x10) 041905		Ø0.8 (x10) 041059		---	---
			Ø0.8 (x10) 041912					
			Ø1.0 (x10) 041929					
3	Springs		(x10) 042988				---	---
4	Contact tips support		(x5) 042902				---	---
5	Liner		Ø0.6/0.8 (3m)	041592	Ø0.6/Ø0.8 (3m, Teflon)	---	---	---
			Ø1.0/1.2 (3m)	041608	Ø1.0/1.2 (3m, Teflon)	---	---	---
6	Roller	TYPE	(x1) Ø0.6/0.8 042339	(x1) Ø0.8/1.0 041189		(x1) Ø0.8/1.0 041196	(x1) Ø0.8/0.9 046856	(x1) Ø0.9/1.2 042346
		A						
		B	---	(x2) Ø0.6/0.8 042353		---	---	---
		D	---	---		(x1) Ø0.8/1.0 039469	(x1) Ø0.8/0.9 039476	(x1) Ø0.9/1.0 044081



Box 150 A



x3
x5
x3
x5 (M6-Ø0.6)
x5 (M6-Ø0.8)
x5 (Alu - M6-Ø0.6)

Ref.041226

No Gas Welding Kit



M6 - Ø0.9/1.0 (x3)
Buse No Gas 150A (x1)
Ø0.9/1.2 (x1)

Ref.041240


Anti-spatter spray

Without silicone



400 ml
Ref.041806

Specialised (MIG/MAG) pliers




❶ Cleans ❷ Cut ❸ Equipped
Ref.041332

PLASMA

Compass kit

For TPT 25
& TPT 40

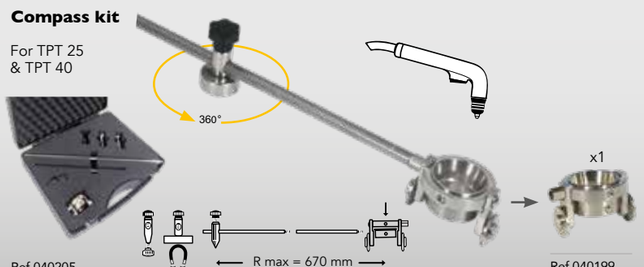

Ref.040205
Ref.040199

Plasma Torch Consumables	MT 25K EASYCUT K25	TPT 25 EASYCUT 25	TPT 40 EASYCUT 40	TPT 35 EASYCUT K35 PFC
x2	Ref. 040175			
x4	Ref. 040182		Ref. 040236	Ref. 040182
x10	Ref. 040151	Ref. 040212		Ref. 080799
x10	Ref. 040168			



Box MT 25K for EASYCUT 25K Ref. 039971
Box TPT 25 for EASYCUT 25 Ref. 070721
Box TPT 40 for EASYCUT 40 Ref. 039957
Box TPT 35 for EASYCUT K35 PFC Ref. 080782

Welding Accessories

Special Welding Magnet







	MAGNETIC P15.90	MAGNETIC P16.90	MAGNETIC P19.90	MAGNETIC P20.180	MAGNETIC D30.90
	Classic				Switchable ON/OFF
max	15 kg	16 kg	19 kg	20 kg	30 kg
	60/90°	45/90/135°	45/90/135°	articulated 0 > 180°	45/90/135°
x	2	4	1	1	1
	100 x 73 x 12	45 x 32 x 28	156 x 102 x 20	204 x 86 x 28	111 x 95 x 25
Ref.	047044	044180	044203	044302	044197

Cables



25 mm²
↔ 5 m

Ref.045408

Earth Clamps



200 A
max : 35 mm²
Ref.043107



300 A
max : 70 mm²
Ref.037939



400 A
max : 70 mm²
Ref.043206

Assembled
150/200 A
16 mm²
10/25 mm²
↔ 2m
Ref.043770



Connectors

CFM 25.14
10/25 mm²
Ref.045507



Gas Regulators





	12 L/min	15L/min
FR/ES/PT	041820	041998
DE	041820	041998
UK	---	040274
NL	---	040267
IT	---	038691

For disposable bottles
Ref. 041639

Disposable Gas Bottles

AR / CO^2
1.8 l (150 l)
Ref.043664

2.2 l (220 l)
Ref.043671

AR pur
2.2 L (220L)
Ref.043688



Brush Hammer

Ref.044166



Pick Hammer



260 mm
240 g
Ref.044159

PRO 270 mm
370 g
Ref.066663

PRO 290 mm
465 g
Ref.044135

PRO 320 mm
425 g
Ref.044142

Wire Brushes



Brass-plated steel
❶ Ref.038073

Zinc-plated steel
❷ Ref.038080

Steel
❸ Ref.044241
❺ Ref.044227

Stainless steel
❹ Ref.044258
❺ Ref.044289

Protective Equipment

Splash guards / grinding



Grinding goggles
Ref.042810



Anti-spotter & anti-mist mask
Ref.042827



Protective goggles
Ref.042841 Shade /IR5

❶ 
❷ 

Protective goggles
❶ Ref.047778 ❷ Ref.047792



Protective face shield for grinding
Ref.042865



Luxury protection helmet colourless
Ref.047839



Hard hat with noise and eye protection
Ref.064218 Shade5

Hoods



Fireproof cotton welding hood
Ref.045224



Fireproof fabric welding hood
Ref.037687

Gloves

Split leather welding gloves	Heavy duty welding gloves	PRO TIG welding gloves	PRO TIG EXTRA welding gloves	Handling gloves
Ref.045101 T10	Ref.045873 T10	Ref.088580 T9 Ref.088597 T10	Ref.045323 T10	Ref.045897 T9



Protective Kits



Basic equipment kit
Ref.070493



Professional kit
Ref.070561

Jackets



98% cotton , 2% antistatic

S	Ref.046313
M	Ref.046320
L	Ref.046337
XL (52/54)	Ref.046344
XXL	Ref.046351

Aprons

Multi-purpose apron in leather crust
Ref.045200



Professional welding apron
Ref.045217



Welding Sleeves



Ref.045231 x2


Trousers



98% cotton, 2% antistatic

S (40/42	Ref.046368
M (44/46)	Ref.046375
L (48/50)	Ref.046382
XL (52/54)	Ref.046399
XXL (56/58)	Ref.046412

Welding Helmets



MANUAL 11



HAND MASK 11
Ref.042209



FLIP FLAP 0/11
Ref.042513

ACCESSORIES



x2 Sweatbands
Ref.043466



Helmet protection bag
Ref.043299



Welding helmet carry case
Ref.066656

LCD 11

TRUECOLOR ULTRA CLEAR 3



TECHNO 11
Ref.064997



MASTER 11
Ref.043442



SPACE 11
Ref.062245



EXPERT 11 CARBON
Ref.040755



INVADER11
Ref.062252



FLIP FLAP 11
Ref.089662

LCD 9-13 ADJUSTABLE

TRUECOLOR ULTRA CLEAR 3



TECHNO 9/13
Ref.065048



VENUS 3/9-13 G IRON
Ref.064980



VENUS 3/9-13 G BONES
Ref.064973



VENUS 3/9-13 G
Ref.064966



VENUS 3/9-13 G BLUE
Ref.079748



VENUS 3/9-13 G RED
Ref.079755

LCD 4-13

TRUECOLOR ULTRA CLEAR 3



PLUTON 3/4-13 G
Ref.091245



PLUTON ZEBRA 3/4-13 G
Ref.091252



PLUTON COBRA 3/4-13 G
Ref.091269

PANORAMIC 5-13

TRUECOLOR ULTRA CLEAR 3



APOLLO + 3/5-13 G
Ref.068681



3-5-9/9-13 Adjustable



Fixed shade 5

LCD 5-13

TRUECOLOR



FIREMAN 3/5-13 G
Ref.062269 ULTRA CLEAR 3



PROMAX 3/5-13 G VOLCANO
Ref.037205 ULTRA CLEAR 3



PROMAX 3/5-13 G BLUEWATER
Ref.083158 ULTRA CLEAR 3



PROMAX 3/5-13 G SILVER
Ref.045774 ULTRA CLEAR 3



ZEUS 4/5-13 G FIRE Ref.044098



ZEUS 4/5-13 G COSMIC
Ref.044104



ZEUS 4/5-13 G INDIAN
Ref.038332



SPACEVIEW 3/5-13 G XXL AZUR
Ref.088696 ULTRA CLEAR 3

Lenses

					TRUE COLOR		DELAY	sensors					
105 x 50 (x50)	042629	105 x 50 (x50)	042643	HAND MASK 11	11	---	---	---	---	---	92x36 mm	---	---	---	345g
110 x 90 (x5)	040816	110 x 90 (x5)	040762	FLIP FLAP 0/11	11	---	---	---	---	---	97x80 mm	●	---	Simple	385g
110 x 90 (x5)	040816	102 x 40 (x5)	040830	TECHNO 11	3 › 11	●	0.60 ms	0.35 s	2	1/1/1/1	98x35 mm	---	☼	Simple	396g
110 x 90 (x5)	040816	103.5 x 54.5 (x5)	040847	MASTER 11	3 › 11	●	0.50 ms	0.35 s	2	1/1/1/1	100x49 mm	---	☼	Simple	548g
392 x 117 (x3)	065215	103.5 x 54.5 (x5)	040847	SPACE 11	3 › 11 + 2 x : 5	●	0.50 ms	0.35 s	2	1/1/1/1	100x49 mm	---	☼	Multi	470g
119 x 98 (x5)	040823	103.5 x 54.5 (x5)	040847	EXPERT 11 CARBON	3 › 11	●	0.50 ms	0.35 s	2	1/1/1/1	100x49 mm	---	☼	Simple	430g
110 x 90 (x5)	040816	103.5 x 54.5 (x5)	040847	INVADER 11	3 › 11	●	0.50 ms	0.35 s	2	1/1/1/1	100x49 mm	---	☼	Multi	460g
110 x 90 (x5)	040816	102.4 x 42.5 (x5)	089631	FLIP FLAP 11	3 › 11	●	0.20 ms	0.30 s	2	1/1/1/1	100x49 mm	●	☼	Simple	457 g
110 x 90 (x5)	040816	95.5 x 50.5 (x5)	040854	TECHNO 9-13	3 - 9 › 13	●	0.08 ms	0.15 s	2	1/1/1/2	92x42 mm	---	☼ + 2▯ (CR 2032)	Simple	430g
110 x 90 (x5)	040816	95.5 x 50.5 (x5)	040854	VENUS 3/9-13 G	3 - 9 › 13	●	0.08 ms	0.15 s	2	1/1/1/2	92x42 mm	●	☼ + 2▯ (CR 2032)	Multi	470g
226 x 106 (x5)	045781	103.5 x 54.5 (x5)	077621	FIREMAN 3/5-13 G	3 - 5 › 9 / 9 › 13	●	0.08 ms	0.15 › 0.8 s	4	1/1/1/2	100x50 mm	●	☼ + 2▯ (CR 2032)	Multi Premium	540g
226 x 106 (x5)	045781	103.5 x 54.5 (x5)	077621	PROMAX 3/5-13 G	3 - 5 › 9 / 9 › 13	●	0.08 ms	0.15 › 0.8 s	4	1/1/1/2	100x50 mm	●	☼ + 2▯ (CR 2032)	Multi Premium	540g
114 x 133 (x10)	043893	103.7 x 69.5 (x5)	043695	ZEUS 4/5-13 G	4 - 5 › 9 / 9 › 13	●	0.08 ms	0.15 › 0.8 s	4	1/1/1/2	XL : 100x67 mm	●	☼+ 2▯ (CR 2450)	Multi	510g
115 x 104 (x5)	091917	101.2x42.5 (x10)	089648	PLUTON 3/4-13 G	3 - 4 › 9 / 9 › 13	●	0.05 ms	0.1 › 1.0 s	2	1/1/1/2	96 x 40 mm	●	☼ + 1▯ (CR 2032)	Simple	408g
114 x 133 (x10)	043893	104 x 96 (x5)	043596	SPACEVIEW 3/5-13 G	3 - 5 › 9 / 9 › 13	●	0.08 ms	0.15 › 0.8 s	4 HS	1/1/1/1	XXL : 100x93 mm	●	☼+ 2▯ (CR 2450)	Multi Premium	540g
114 x 133 (x10)	043893	103.7 x 69.5 (x5)	077102	APOLLO + 3/5-13 G	3-5 › 9 / 9 › 13+2x:5	●	0.08 ms	0.15 › 0.8 s	4 HS	1/1/1/1	XL:100x67+2x87x102 mm	●	☼ + 2▯ (CR 2032)	Multi Premium	610g

HS : High sensitivity

Electric soldering & gas welding

Soldering



60 W
Ref.040373

Complete kit





100 W
Ref.040397



Desoldering pump
Ref.040380

Soldering wire

Tin



Norm ISO EN 9453	Norms DIN 1707	Norms EN 9453	Composition % Sn	Pb	Cu	T° fusion °C	Flux stripper	Ø mm	g	Ref.
TIN LEAD	SnPb60	S-Sn40Pb60	40	60	---	183 - 238	integrated	2	50	046610
									100	046627
									250	047136
	Sn50Pb	S-Sn50Pb50	50	50	---	183 - 216	integrated	1.5	50	046641
									100	046658
									250	047129
	Sn60Pb	S-Sn60Pb40	60	40	---	183 - 190	integrated	1	50	046665
									100	046672
									250	047112
TIN COPPER	SnCu3	S-Sn97Cu3	97	---	3	227 - 310	external 040549	2	50	046689
									100	046696
									250	047143
	SnCu07	Sn993Cu07	99.3	---	0.7	227	integrated	1	100	062696

Soldering flux

T°fusion 450°C
20 g
Ref.040549



Soldering flux for tin alloys

T°fusion 80°C
100 g
Ref.047808



Professional Blow Torches

PIEZO START

Blowtorch
Ref.040342

Blowtorch
Ref.038820



Blow torch, with 2 interchangeable burners
Ref.052741



LIGHTER START

Blow torch with safety valve
Ref.040359




Gas hot air gun
Ref.060777



Included GAS **B3**
Ref.040441

Gas Cartridges

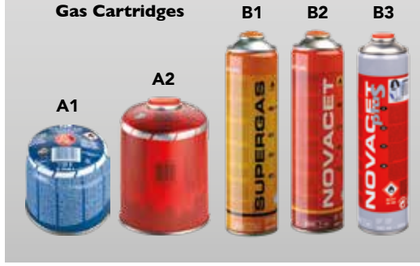

	Connection	Composition % Butane	Propane	Propylene	360°	T°	Norms	ml	g	Ref.	
A1	Pierceable	●	---	---	---	---	EN417 : 2012	360	190	040410	12
A2	European Fitting 7/16"	●	●	---	●	1900°C	EN521 / EN 417	930	460	038837	12
B1		●	●	---	---	1800 › 2100°C	EN417 : 2012 - UN 2037	600	390	040427	12
B2		●	●	●	---	2200°C	EN417 : 2012 - UN 2037	600	450	040434	12
B3		●	●	●	●	2200°C	EN417 : 2012 - UN 2037	380	220	040441	36

Blowtorches

Blowtorch kit
Ref.040328

butane





Blowtorch kit zinc worker
Ref.038844


butane






CH80
Ref.040335

butane / propane






CH120
Ref.038806



included

	oxygen /propane
0,8 kg/h	037069
1,0 kg/h	037076
1,2 kg/h	037083

CH1000
Ref.038875



	oxygen /propane
6 kg/h	037052

High pressure cutting torch

HGI
Ref.038882

Cutting capacity : 120 mm max
L = 470 mm / 1.12 kg



HGI Shielded
Ref.038783

Cutting capacity : 120 mm max
L = 470 mm / 1.27 kg



HPI
Ref.090439

Cutting capacity : 120 mm max
L = 1000 mm / 1.6 kg

NEW



High pressure cutting G1 heads

oxygen/acetylene



calibre caliber	cutting (mm)	
7/10	3>10	038899
10/10	10>25	038905
12/10	25>50	038912
16/10	50>80	038929
20/10	80>120	038936

oxygen/propane



calibre caliber	cutting (mm)	
7/10	3>10	038943
10/10	10>25	038950
12/10	25>50	038967
16/10	50>80	038974
20/10	80>120	038981

Gas welding/brazing torches

Dual gas soldering/ brazing set

3100°

Ref.040366

Prohibited shipping : Expédition interdite : Versand verboten :



included



Novacet
600 ml/330 g

Ref.040434

12



Oxygen bottle 110 l

Ref.040458

12



Cutting nozzle

Ref.039124




G400 (400 L/h)

Ref.038790

oxygen /acetylene

Capacity : 0,4 > 4 mm
L = 330 mm / 320g





included
6 gas welding nozzles
40>400 l/h



Torch only


Ref.039001

Complet kit G400 (400 L/h)

Ref.039117

Capacity : 0,4 > 4 mm
L = 330 mm / 320g

oxygen /acetylene

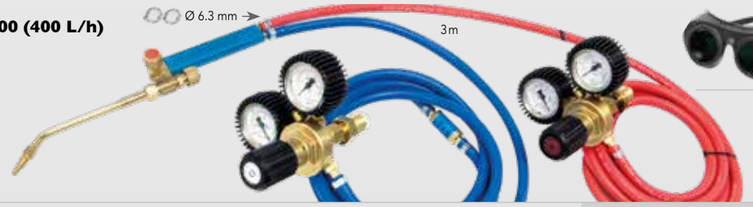



40, 60 & 100 L

included


G401 (400 L/h)

NEW

Ref.090361

Capacity : 0,4 > 4 mm
L = 330 mm / 320g

oxygen /acetylene

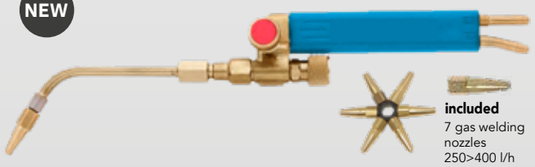

included
7 gas welding nozzles
250>400 l/h



Malleable welding nozzle + nut for G401

100 l/h	090378	**250 l/h**	090408
160 l/h	090385	**315 l/h**	090415
200 l/h	090392	**400 l/h**	090422

G1000 (1000 L/h)

Ref.038868

Capacity : 2 >10 mm /
L = 460 mm / 770 g

oxygen /acetylene



Ø 10 mm



included
7 gas welding nozzles
250>1000 l/h

Gas welding nozzle for G400, G401 & G1000

x1



40 L	090286	**160 L**	090316	**400 L**	090347
63 L	090293	**250 L**	090323	**500 L**	090354
100 L	090309	**315 L**	090330		

x7




40>400 l/h	039025
250>1000 l/h	037007

Set of 14 nozzle cleaners

Ref.090446

NEW



Gas welding/cutting torches

CG1 (400 L/h)

Ref.039018

Welding capacity : 0,4 > 4 mm
Cutting capacity : 50 mm max
L = 320 mm / 450 g



Ø 6.3 mm



included (x2)
Cutting heads (7/10 & 10/10)



included (x1)
welding adaptor for 7 gas nozzles



Cutting heads

	oxygen /acetylene
7/10	038769
10/10	038776
12/10	038813

Gas welding rods



Flux
Paste for Cu/P/Ar
T° work 500-800°C, 100 g
Ref.047440
*not for Cu/Cu brazing

Norms	Composition %						T° fusion °C	Decapant Flux	Ø mm	L mm	X...	Ref.	Applications
DIN 8513	Ag	Cu	Zn	P	Iron	Other							
STRONG BRAZING													
Cu P 6	—	94	—	6	—	—	710-880	paste (ref. 047440)*	2	333	5	047181	Copper - copper. For plumbing, heating, sanitation.
											25	047198	
										500	25	047204	
											1 kg	047211	
Ag 5 P	5	88.8	—	6.2	—	—	645-810	paste (ref. 047440)	2	333	5	047228	Copper - Copper and copper alloys. Must use welding flux on copper - brass. For air conditioning, refrigeration.
Ag 40Sn	40	30	28	—	—	Sn 2	640-700	paste (ref. 047440)	1.5	333	2	047266	Copper, brass, steel, stainless steel. For air conditioning, refrigeration, heating, electrical equipment.
									2	333	2	047273	
Cu Zn40	—	60	40	—	—	Si 0.25	890-900	powder	2	333	5	047280	Steel, galvanized steel, copper, cast iron. For heating, car body, agricultural machinery.
										500	8	047297	
CuNi10 Zn42	—	48	41.8	—	—	Ni 10 Si 0.2	920-935	integrated	2	500	8	047303	
BRAZING ALUMINUM BASED ALLOYS													
Zn + Al	—	—	98	—	—	Al 2	375-388	integrated	2	500	2	047433	For alu-alu and alu-copper. Air conditioning, refrigeration: manufacture and repair. Excellent capillarity, high elongation.
BRAZING COPPERED STEEL													
Fe + Cu	—	0.15	—	0.012	98	Si 0.2 - Mn 1	1 500	integrated	1.6	333	10	047150	Iron / steel.
									2	333	10	047167	
									2	500	10	047174	

Gas lighter

Ref.090453



included x5

Cup only

Ref.040403



Pre Brazing Cleaning pads

x5



Ref.047563

Gas welding goggles





Shade/IR5

Ref.042803





Shade/IR5

Ref.042858

FLAME arrestor NON return valve OX/AD · WITHOUT HOSE CLAMPS

Ref.090255

NEW




Flashback arrestor kit



Ref.039070

EN 730-1



Quick release connectors OX/AD

EN 730-1



Ref.039087




OX & AD

48 x 27 x 104 cm / 13.2 kg

66.5 x 33 x 12 cm / 13.9 kg

Ref.083851

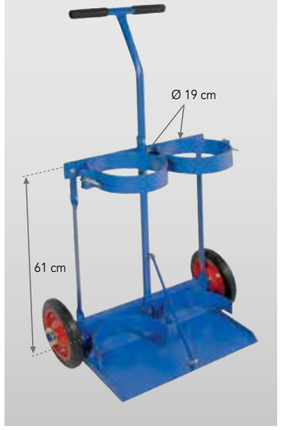

Regulators

EN 585/ISO 2503



Oxygen
5m³/h

Ø 6.3 mm

Ref.039032

Acetylene
1m³/h

Ref.039056



PRO Ø 10 mm

Oxygen PRO
max 70 m³/h
moy 31 m³/h

Ref.039049
(DE) 037250

Acetylene PRO
max 26 m³/h
moy 5 m³/h

Ref.039063
(DE) 037267

Propane PRO
max 26 m³/h
moy 5 m³/h

Ref.038993
(DE) 037274

Hose

Kit OX/AD :

Ø 6,3 mm	2 x 4 m (■ + ■)	039094
	100 m ■	064294
	100 m ■	064287
Ø 10 mm	2 x 4 m	039452
	40 m ■	064317
	40 m ■	064300



x4

Kit Propane :

x2

Ø 6.3 mm, 4 m
Ref.038851

Ø 10 mm, 4 m
Ref.037090

BATTERY MAINTENANCE

ENERGY CHARGER TRADITIONAL





ENERGY 126
4A 12V

Ref.023222
(UK) Ref.025165



TCB CHARGERS AUTOMATIC



TCB 120
3.5/7A 12V

Ref.023284
(UK) Ref.025240



OLD DESIGN

NEW DESIGN



WATTMATIC 100
5A 6/12V

Ref.024823



Made in GYS China	50/60Hz		CHARGE				Polarity Protection	Auto-restart Memory	Start/Stop Motor	Fuse	L × W × H cm / kg
				Average	Effective / RMS	Rec					
ENERGY 126	220 - 240 V	90 W	12 V	4 A	6 A	---	---	•	---	10 A	16.6 x 11.8 x 22.5 / 2
TCB 120	220 - 240 V	150 W	12 V	3.5 - 7 A	10.5 A	2	•	•	•	15 A	17.9 x 12.3 x 30.4 / 3.2
WATTMATIC 100	230 V - 50 Hz	170 W	6 - 12 V	3 - 5 A	11.4 A	2	•	•	•	10 A	26.9 x 24.3 x 12.8 / 3.7

ARTIC CHARGERS AUTOMATIC HF INVERTER



ARTIC 800
0.8A 12V

Ref.029569
(UK) Ref.029682



ARTIC 1500
1.5A 12V

Ref.029576
(UK) Ref.029699



ARTIC 4000
4/1-4A 6/12V

Ref.029583
(UK) Ref.029705




ARTIC 8000
2/8A 12V

Ref. 029590
(UK) Ref.029712




Included



Made in GYS China	50/60Hz	m	CHARGE		Polarity Protection	Cold Charge	Auto-restart memory	Total Security	Start/Stop motor	L × W × H cm / kg
				I Charge (EN 60335)						
ARTIC 800	100 - 240 V	1.6	15 W	12 V	0.8 A	•	---	•	---	---	6 x 15.1 x 25.5 / 0.43
ARTIC 1500	220 - 240 V	1.6	27 W	12 V	1.5 A	•	---	•	---	---	25.7 x 15.1 x 6 / 0.5
ARTIC 4000	220 - 240 V	1.6	75 W	6/12 V	4 / 1 - 4 A	•	•	•	•	•	24.9 x 15.1 x 6 / 0.8
ARTIC 8000	220 - 240 V	1.6	130 W	12 V	2 / 8 A	•	•	•	•	•	34.1 x 17.7 x 7.3 / 1.1

	CHARGER + TESTER	CONTROL
ENERGY 126	---	---
TCB 120	•	•
WATTMATIC 100	---	---
ARTIC 800	---	---
ARTIC 1500	---	---
ARTIC 4000	---	---
ARTIC 8000	---	---

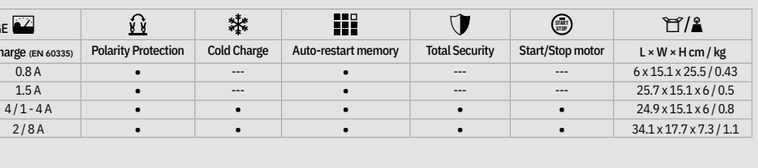

m = maintenance

GYSFLASH CHARGERS AUTOMATIC HF INVERTER



GYSFLASH 1.12
1A 12V



Ref.029361 (UK) Ref.029514



GYSFLASH 4.12
0.8/4A 12V



Ref.029422 (UK) Ref.029521



GYSFLASH 6.12
0.8/6A 12V



Ref.029378 (UK) Ref.029613



GYSFLASH 8.12
0.8A 12V



Ref.029385





F4 / CHARGE INDICATOR EYELETS
ø M6 L 0.56 m (1.3 mm²)
All 12V LEAD

Ref. 029200



F5 / CIGARETTE LIGHTER AND CAN-BUS ADAPTOR
L 0.45 m (0.82 mm²)

Ref. 029439




KIT F7 / FLASH MLX
L 0.45 m (1.3 mm²)

Ref. 027589



GYSFLASH 6 HERITAGE
0.8/6A 6/12V

Ref.029538





GYSFLASH 6.24
0.8/6A
6/12/24V

Ref.029460





GYSFLASH 9.24
9A
6/12/24V

Ref.029477
(UK) Ref.029651





GYSFLASH 1.12 LITHIUM
1A 12V

Ref.029675



	I charge	V	Wave	Load curve	Steps	Polarity Protection	Cold Charge	Auto-restart memory	Total Security	Start/Stop motor	CAN Bus	Auto Recovery	L × W × H cm / kg	IP
GYSFLASH 1.12	1 A	12 V	< 150 mV Rms	IUoU	7	•	---	•	•	•	•	•	30 x 15.5 x 3.8 / 0.44	65
GYSFLASH 4.12	0.8 / 4 A	12 V	< 150 mV Rms	IUoU	7	•	•	•	•	•	•	•	34.5 x 17.9 x 36.2 / 0.89	65
GYSFLASH 6.12	0.8 / 6 A	12 V	< 150 mV Rms	IUoU	8	•	•	•	•	•	•	•	36 x 19.5 x 7 / 1	65
GYSFLASH 8.12	8 A	12 V	< 150 mV Rms	IUoU	8	•	•	•	•	•	---	•	36 x 19.5 x 7 / 1	65
GYSFLASH 6 HERITAGE	0.8 / 6 A	6 / 12 V	< 150 mV Rms	IUoU	8	•	---	•	•	•	---	•	36.5 x 19.4 x 7 / 1	65
GYSFLASH 6.24	0.8 / 6 A 0.8 / 4 A	6 / 12 V 24 V	< 0.4 Ah/month	IUoU	7	•	---	•	•	•	---	•	36.5 x 19.5 x 7 / 1	65
GYSFLASH 9.24	9 A 6 A	6 / 12 V 24 V	< 0.4 Ah/month	IUoU	8	•	---	•	•	•	---	•	36.5 x 19.5 x 7 / 1.3	65
GYSFLASH 1.12 LITHIUM	v	12 V	< 0.4 Ah/month	IUoU	8	•	---	•	•	•	•	---	29.7 x 15 x 5.7 / 0.6	65

m = maintenance

CHARGING & STARTING

START CHARGERS & STARTERS TRADITIONAL

OLD DESIGN

NEW DESIGN



START 300
23A 12/24V

Ref.025547



NEOSTART 320
9/40V 12/24V

Ref.025301

CHARGER & STARTER AUTOMATIC

3 in 1
Start +Charge +Test



OLD DESIGN

NEW DESIGN
07/2026

STARTUP 80
17A 12V

Ref.024922
(UK) Ref.025127

Made in GYS China	50/60Hz		CHARGE Reg.	Effective / RMS	Average	Boost	Manuel	min › max	Fuse	L × W × H cm / kg								CHARGER + TESTER
START 300	230 V	12 / 24 V	3	13 - 36 A	10 A / 8 A	23 A / 17 A	•	42 › 300 Ah 38 › 224 Ah	80 A	40 x 35 x 23.5 / 12.4	35 › 50 Ah		P:50 › 100 Ah					---
NEOSTART 320	230 V	12 / 24 V	3	40 A	10 A / 9 A	40 A / 30 A	•	20 › 700 Ah	150 A	41 x 35 x 24 / 14.7	50 › 80 Ah				P:80 › 120 Ah			---
STARTUP 80	230 V	12 V	2	13.5 - 25 A	9 A	17 A	---	40 › 170 Ah	---	19 x 12 x 32 / 4.2	P:35› 50Ah							•

P : Precharge (±10min)

GYSPACK BOOSTERS INTEGRATED LEAD BATTERY



NEW

OLD DESIGN

NEW DESIGN
07/2026

OLD DESIGN

NEW DESIGN
05/2026

GYSPACK 400
1250A 12V

Ref.025455
(UK) Ref.025516

GYSPACK AIR 401
1150A 12V
COMPRESSOR 17 bars

Ref.088801
Air kit

GYSPACK 600
1750A 12V

Ref.027336

GYSPACK PRO
1750A 12V

Ref.026155
(UK) Ref.025523

Made in GYS China	12V	START Inside	1 V/C	Cranking CC	Peak Battery				Power Supply		L × W × H cm / kg					
GYSPACK 400	18 Ah	12V	480 A	900 A	1250 A	---	---	---	12 V DC / 0.5A	•	26 x 13 x 29.5 / 6.4	5 › 50 Ah				
GYSPACK AIR 401	17 Ah	12V	380 A	700 A	1100A	•	•	17 bars	(x2) Cigarette Lighter : 12V - 8A USB-A Port 5V/ 2.1 A	•	31.4 x 18.8 x 31.2 / 7.4	5 › 50 Ah				
GYSPACK 600	22 Ah	12V	550 A	1050 A	0750 A	---	---	---	12 V DC	•	29.5 x 16 x 35.5 / 8.2	5 › 90 Ah				
GYSPACK PRO	22 Ah	12V	600 A	1100 A	1750 A	•	•	---	12 V DC	•	39 x 17 x 45 / 9.5	5 › 90 Ah				

Included Gyspack 400 / Air 401 / 600 / PRO
Power in 110-240 V out 12 V - 50/60 Hz



Ref.054677
(UK) Ref.054660

NOMAD POWER BOOSTERS



NOMAD POWER 401
900A
Ref.087316 +

NOMAD POWER 501
1200A
Ref.087323 +

3 in 1
Booster + Power bank + Light



NOMAD POWER PRO 701
1250A
Ref.085855 +

NOMAD POWER PRO 801
1500A
Ref.085831 +

NOMAD POWER PRO 901 FC
1700A FAST CHARGE
Ref.085879 +



NEW

4 in 1
Booster + Compressor + Power bank + Light

NOMAD POWER AIR 502
1200A COMPRESSOR
10 bars - 28 l/min
Ref.089846 +
Air kit



67 W Fast USB-C Charger
For Nomad Power PRO 901 FC
Ref.087132



15 W USB-C Charger
For Nomad Power 401 / 501 / AIR 502
PRO 701 / PRO 801 / PRO 901 FC
Ref.087101



15 W USB-C Charger
For Nomad Power 401 / 501 / AIR 502
PRO 701 / PRO 801 / PRO 901 FC
Ref.087354

Made in China	LITHIUM Capacity Cell	TYPE	Full Charge	START 1V/Cell	0V/Cell	Peak Battery	START Petrol & Diesel (Pb/ Lead only)	Input	Output	L×W×H mm/kg							
NP 401	2.5 Ah-37 Wh	LiCoO2	3 h	350 A	700 A	900 A	12 V	USB-C : 5V/2A	USB 3.0 QC - USB-A	145×85×30/0.32	5 › 70 Ah						
NP 501	3 Ah-45 Wh	LiCoO2	3h30	500 A	1000 A	1200 A	12 V	USB-C : 5V/2A	USB 3.0 QC - USB-A - JACK DC	175×85×30/0.48	5 › 90 Ah						
NP AIR 502	3 Ah-44.4 Wh	LiCoO2	3h30	500 A	1000 A	1200 A	12 V	USB-C : 5V/2.4A	USB-A - AIR HOSE - STARTER CABLE	209×131×58.8/1	5 › 90 Ah						
NP PRO 701	4 Ah-59.2 Wh	LiCoO2	3 h	700 A	1100 A	1250 A	12 V	USB-C : 5V/3A	USB 3.0 QC - USB-A - USB-C - JACK DC	228×10×38/0.82	5 › 140 Ah						
NP PRO 801	5 Ah-74 Wh	LiCoO2	4 h	850 A	1300 A	1500 A	12 V	USB-C : 5V/3A	USB 3.0 QC - USB-A - USB-C - JACK DC	228×10×38/0,82	5 › 150 Ah						
NP PRO 901 FC	6 Ah-92.5 Wh	LiCoO2	1h15	900 A	1400 A	1700 A	12 V	PD USB-C : 60W max	USB 3.0 QC - USB-A - USB-C - JACK DC	228×10×38/0,82	5 › 150 Ah						

STARTER CABLES





INSULATED CLAMPS





UNINSULATED BRASS CLAMPS

Made in China	Ref.		Essence Benzine - Petrol	Diesel		≈ Ø CU	DIN 72553
	056312	**200 A**	1.5 l	---	3 m	10 mm²	---
	056329	**320 A**	2.5 l	---	3 m	16 mm²	•
	056336	**500 A**	5.5 l	3 l	3.5 m	25 mm²	•
	056343	**700 A**	7 l	4 l	4.5 m	35 mm²	•

	Ref.			x8	
Made in China	056206	**320 A**	3 m	---	16 mm² (CCA)
	564015	**500 A**	3 m	---	25 mm² (CCA)
	056404	**700 A**	4.5 m	---	35 mm² (CCA)
	056602	**1000 A**	5.1 m	---	50 mm² (100% Cu)
Made in France	056190	**1000 A**	4.5 m	Included	50 mm² (100% Cu)

Not available in Germany and Austria.

OTHER PRODUCTS

EV CHARGING



EV CHARGING PORTABLE
10/16A 1 ph
Ref.028975



EV CHARGING STANDARD CABLES
32A 1 ph
Ref.079687





SUPER PRO SMART EV CHARGE
6/32A 1/3 ph
Ref.075320
(UK) Ref.080676



	IP	U1	I1	P					L × W × H cm / kg
EV CHARGING PORTABLE	66	1 ph	10 / 16 A	2.3 / 3.7 kW	•	---	5 m	Type 2	39 x 41 x 9 / 2.6
EV CHARGING STANDARD CABLES	55	1 ph	32 A	7.4 kW	---	•	5 m	Type 2	N/C
SUPER PRO SMART EV CHARGE	65	1 ph 3 ph + N	6/8/10/13/ 16/20/32 A	1.4 › 22 kW	•	---	5 m	Type 2	230 x 160 x 90 / 4.5

POWER	6 A	8A	10 A	13 A	16 A	20 A	32 A
230 V	1.4 kW	1.8 kW	2.3 kW	2.9 kW	3.7 kW	4.6 kW	7.4 kW
400 V	4.1 kW	5.5 kW	6.9 kW	8.9 kW	11 kW	14 kW	22 kW

CHARGE ACCESSORIES



SOLAR POWER KITS
Ref.072411



QUICK CONNECTORS
Ref.054455



Fuses	Ref.
10 A	054530
15 A	054493
20 A	054509
25 A	054516
30 A	054523
40 A	054554

FUSES



Ø 10 mm / 35 mm²
Ref.054400

POLES



CLEANING BRUSH
Ref.027572



40 A
Ref.053106



60 A
Ref.071872

Not available inGermany and Austria.



200 A
Ref.053502
Ref.053403



300 A
Ref.053700
Ref.053601

CHARGING CLAMPS



ANTIFREEZE MEASURER
Ref.054103



	↔ L			A (60%)
10 mm²	100 m	054882	054875	88 (60%) 92 (35%)
16 mm²	100 m	054905	054899	120 (60%) 130 (35%)
25 mm²	100 m	054929	054912	164 (60%) 184 (35%)

ELECTRIC CABLES

COMPRESSOR 3 IN 1



NOMAD AIR COMPRESSOR
10 bars - 30 l/min Ref.088795



Air kit

INDUCTION HEATING

Rapid electromagnetic induction heating tool without open flame. Precise application, helps to protect the surrounding components.

Quickly loosens metal components that are seized due to rust, corrosion, or industrial adhesives. Ideal for maintenance, automotive repair, and DIY projects.

SAFE **FAST** **EASY**










HANDUCTOR
1100 W
Ref.090484





NEW



NEW

POWERDUCTION 10R
1200 W

10R **ONE**
Ref.089617
(UK) Ref.089624

10R **PLUS**
Ref.062504
(UK) Ref.068643
(AU) Ref.080966

10R **PRO**
Ref.080195
(UK) Ref.080300

POWERDUCTION 18R
1750 W

18R **ONE**
Ref.091047
(UK) Ref.091054

18R **PLUS**
Ref.091061
(UK) Ref.091078

18R **PRO**
Ref.091085
(UK) Ref.091092



ONE (1 inducteur)
Ø18 - côté



PLUS (5 inducteurs)
Ø18/24/30 Ø18/24/30
flexible droit




PRO (12 inducteurs)
Ø18/21/24/27/30 Ø18/21/24/27/30
flexible droit

Made in GYS China				Freq.	Cable L (m)	Heating			Protected & compatible power generator (+/-15%)	L × W × H cm / kg
HANDUCTOR	230 V 50/60 Hz	5 A	1100 W	55 kHz	1.8	M 10 › 1 s	2 mm › 5 s	Ø 8 › 10 s	1.5 kW	43 x 10 x 23 / 3.3
POWERDUCTION 10R ONE / 10R PLUS / 10R PRO	230 V, 1~ 50/60 Hz	10 mini	1200 W	45 › 80 khz	2	M 10 › 1 s	2 mm › 5 s	Ø 8 › 10 s	1.5 kW	089617 - 38 x 13 x 24 / 4 062504 - 42 x 17 x 37 / 5.6 080195 - 46 x 21 x 38 / 6.6
POWERDUCTION 18R ONE / 18R PLUS / 18R PRO	230 V, 1~ 50/60 Hz	10 mini	1750 W	45 › 80 khz	2	M 10 › 1 s	2 mm › 5 s	Ø 8 › 10 s	2 kW	091047 - 38 x 13 x 24 / 4 091061 - 42 x 17 x 37 / 5.6 091085 - 46 x 21 x 38 / 6.6

LED LAMPS




HANDHELD LED LIGHT
400 LUMENS
Ref.059153




HANDS-FREE COLLAR TORCH
180-360 LUMENS
Ref.088559

COB LED LAMP
100-280 LUMENS
Ref.060845



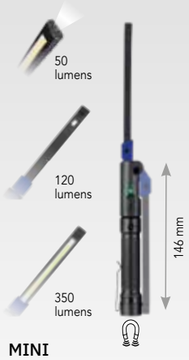

MINI INSPECTION LAMP
0-350 LUMENS
Ref.075894



UNDER BONNET WORK LAMP + TRIPOD
250-800 LUMENS
Ref.058002



TRIPOD LAMP
4000 LUMENS
Ref.059986

POWER PACK PORTABLE POWER SOURCE



POWER PACK 520
518Wh 500W
Ref.027961




POWER PACK 14.22
1408Wh 2200W
Ref.085206

POWER PACK 520, 14.22 OPTION

SOLAR PANEL
for Power pack 520 & 14.22
Ref. 079410

monocrystalline
ETFE quality - 18V - 100 W max

Output
USB 1 : 5V/3A
USB 2 : 5V/3A ; 9V/2A ; 12V/1.5A
Type C : 5V/3A ; 9V/2A ; 12V/1.5A
Jack :18V/5.6A max





POWER PACK 14.15 FC
1408Wh 1500W
Ref.085169

FAST CHARGE
100% in 60min

POWER PACK 14.15 FC OPTIONS

POWER BATT 14
EXTERNAL BATTERY
1408 Wh - LiFePO4 Ref.085213
42 × 30 × 25.5 cm / 12.8 kg





included

1408 Wh + 1408 Wh = 2816 Wh Using time (×2)

SOLAR PANEL
Ref.079403

monocrystalline - ETFE quality
48V - 220 W max


Output : **MC4**

NEW



POWER PACK
29.36 FC
2816Wh 3600W
Ref.090156

FAST CHARGE
100% in 90min



✓ MMA
✓ TIG
✓ MIG
✓ PLASMA
& more



		LITHIUM			I			AC OUTPUT			OUTPUT	Power supply		LIGHT	L × W × H cm / kg
		Capacity / cell	Full charge	Type	Start	Peak	INPUT	230V / 50Hz (Pure Sine Wave)	Rating Power OUT	Peak Power OUT					
	POWER PACK 520	518 Wh	6h30	LiPo	---	---	12-30V 80W max	(x2) Type C / E / F / G / I	500W	750W (3sec)	(×2) USB-C / (×2) USB-A / (×2) JACK DC / Cigarette Lighter	•	3 + 1(MICRO USB - Type C)	1 x LED	33.5 x 23 x 34.5 / 6.2
	POWER PACK 14.22	1408 Wh	7h30	LFP	500 A	1000 A	12-30V 200W max	(x3) Type C / E / F (euro plug)	2200W	4400W	(×2) USB-C / (×4) USB-A / (×2) JACK DC / Cigarette Lighter	•	4 + 2(MICRO USB - Type C)	1 x LED	---
	POWER PACK 14.15 FC	1408 Wh	1h	LFP	500 A	1000 A	30-60V 400W max	(x3) Type C / E / F (euro plug)	1500W	3000W	(×2) USB-C / (×4) USB-A / (×2) JACK DC / Cigarette Lighter	•	4 + 2(MICRO USB - Type C)	1 x LED	43 x 36.5 x 33.5 / 22
	POWER PACK 29.36 FC	2816 Wh	1h30	LFP	---	---	220-240V 2200W max 12-80V 800W max	(x4) Type C / E / F (euro plug)	3600W	6000W	(×2) DC5521 / (×2) DC RV / (×2) USB-C (×2) USB-A / (×2) USB-A QC3.0 (×2) Cigarette Lighter	•	4 + 2(MICRO USB - Type C)	1 x LED	42 x 38 x 43 / 38.5

BATTERY TESTERS



TBP 100
6/12V
Ref.055131



TBP 500
12V
Ref.055148

TRADITIONAL



BT 001
12V
Ref.056640



NBT 200
12V ALTERNATOR 12V
Ref.024168

DIGITAL



BTW 6 / 12V
6/12V START STOP
Ref.077355

CONNECTED



DBT 410
12V
ALTERNATOR 6-12V
Ref.083233

COLOR SCREEN

				Battery A	Battery V	Charge & Start System Vehicle	Digital	Result		L × W × H cm / kg
Made in China	**TBP 100**	6 - 12 V	20 › 100 Ah	•	•	12 V	---	5/10 s	15 min	30.7 x 17.2 x 10.3 / 1.5
	TBP 500	12 V	10 › 160 Ah	•	•	12 V	---	15 s	15 min	31 x 28.6 x 18.2 / 3.8
	BT 001	12 V	7 › 230 Ah	---	•	12 V	LED	1 s	instant	24.2 x 11.8 x 2.4 / 0.29
	NBT 200	12 V	20 › 150 Ah	•	min 7 V	12 V	•	1 s	instant	5 x 18 x 25.8 / 0.3
	BTW 6V/12V	6 - 12 V	7 › 240 Ah	---	min 4.5 V	12 V	---	1 s	instant	7.5 x 4.5 x 16.4 / 0.16
	DBT 410	6 - 12 V	7 › 240 Ah	•	min 5 V	6 - 12 V	Color screen 2.4"	1 s	instant	4.2 x 8.5 x 15 / 0.27

POWER INVERTERS

P.S.W. Pure Sine Wave



CONVERGYS 150
150W
Ref.027022
(UK) Ref.027039



CONVERGYS 300
300W
Ref.027053
(UK) Ref.027046



PSW 601W RC-12
600W
Ref.067332
(UK) Ref.067349
48 cm 48 cm 1 m



PSW 1502W RC-12
1500W
Ref.067370
(UK) Ref.067387
48 cm 48 cm 1 m



PSW 3000W RC-12
3000W
Ref.089853
48 cm 48 cm 1 m

NEW

Made in China	Power	Peak Power	Pure Sin Wave	Optimum Efficiency	Input DC	Output AC	Output USB (2.1) DC	max 150 W			Universal			L × W × H cm / kg
CONVERGYS 150	150 W	300 W	---	90.5%	12V	230V	5 V - 2 A	•	---	1.5 mm²	•	---	---	8 x 16.5 x 24.7 / 0.45
CONVERGYS 300	300 W	600 W	---	85%	12V	230V	5 V - 2 A	•	•	2.5 mm²	•	---	---	21.3 x 20 x 6.8 / 0.95
PSW 601W RC-12	600 W	1200 W	•	90%	12V	230V	5 V - 2 A	---	cables	6 mm²	•	•	6 m	31 x 22 x 12 / 2.3
PSW 1502W RC-12	1500 W	3000 W	•	90%	12V	230V	5 V - 2 A	---	cables	16 mm²	•	•	6 m	44 x 27 x 16 / 4.6
PSW 3000W RC-12	3000 W	6000 W	•	85%	12V	230V	5 V - 2 A USB-C 18W (5V/3.1 A - 9V/2 A - 12V/1.5 A)	---	cables	18 mm²	•	•	6 m	58 x 35 x 28 / 10.7

INVEST IN THE FUTURE

SELECTION

WELDING & CHARGE

2026

GYS France

Headquarters
1 rue de la Croix des Landes
CS 54159
53941 Saint-Berthevin - Cedex
Laval - France
Tel +33 2 43 01 23 60
E-mail service.client@gys.fr

ZI, 134 bd des Loges
53941 Saint-Berthevin
Laval - France

Logistic center
2 Rue Jean Dausset
53810 Changé - France
Tel +33 2 43 01 54 33

GYS Germany
Professor-Wieler
Straße 11
52070 Aachen
Deutschland
Tel +49 241/189-23-710
Fax +49 241/189-23-719
E-mail aachen@gys.fr

GYS UK
Unit 3 - Great Central Way
Rugby - Warwickshire
CV21 3XH
United Kingdom
Tel +44 1926 338 609
Fax +44 1926 429 764
E-mail uk@gys.fr

GYS Italia
Via Porta Est, 7
30020 Marcon - VE
Italia
Tel +39 041 53 21 565
E.mail italia@gys.fr

GYS Ibérica
Avenida Pirineos 31
Nave 9
San Sebastian de los Reyes
28703 Madrid
España
Tel +34 917 409 790
E.mail iberica@gys.fr

GYS China
Lot N°15 - 6666 bd Songze
201706 Qingpu
Shanghai - China
Tel +86 6221 4461
Fax +86 5226 0067
www.gys-china.com.cn
E-mail
contact@gys-china.com.cn

LinkedIn
Youtube
WeChat
Facebook
Instagram

www.gys.fr

Distributed by

Document non contractuel. GYS se réserve le droit de modifier les spécifications et les tarifs de ses appareils, sans délai ni préavis, et en cas d'erreur typographique ou d'impression. • Non-contractual document. GYS reserves the right to modify the specifications and prices of its products without notice or delay, and in the event of typographical or printing errors. • Documento non contrattuale. GYS si riserva il diritto di modificare le specifiche e i prezzi dei suoi prodotti senza preavviso in caso di errori tipografici o di stampa.
• Dieses Dokument ist nicht vertraglich bindend. GYS behält sich das Recht vor, Spezifikationen sowie Preise seiner Geräte jederzeit und ohne vorherige Ankündigung zu ändern. Dies gilt ebenso im Falle von Druck- oder Schreibfehlern. I.P. - 110 g